



Product data sheet

COMPASS
03.3524/HIT-CRI/70W/12°
FLOS

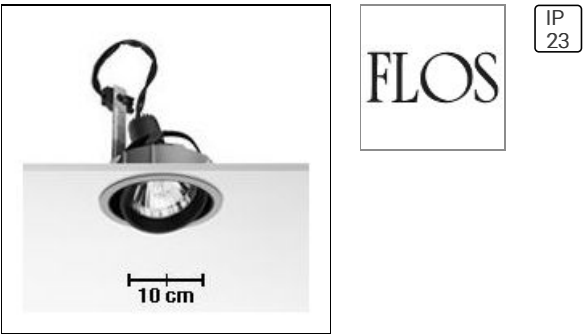

Luminaire for halogen and high-pressure discharge lamps. Injection-moulded aluminium reflector body with powder-coated finish. Lamp support with die-cast aluminium, black powder-coated heat dissipating element. Thermoplastic recessed ring and screening ring, die-cast aluminium, black powder-coated anti-glare ring. 4 mm. tempered glass cover. Stainless steel fixing brackets.

Light output 1



| | | | |
|-----------------------|---------|-------------|---------|
| 1 x Metal halide lamp | | | |
| Nominal lamp power | 70 W | Socket | G12 |
| Lamp flux | 6600 lm | LOR | 69% |
| Luminous efficacy | 65 lm/W | Total flux | 4529 lm |
| CCT | 3000 K | Total power | 70 W |
| CRI | 83 | | |

Mounting mode

Ceiling recessed

Shape and measurements

Height: 8.66 in
Diameter: 6.38 in

Adjustability

Tiltable

Electric

System power: 70 W

Protection

IP: 23