



Product data sheet

COMPASS BOX RECESSED
03.2530/CDM-R111/70W/24°
FLOS

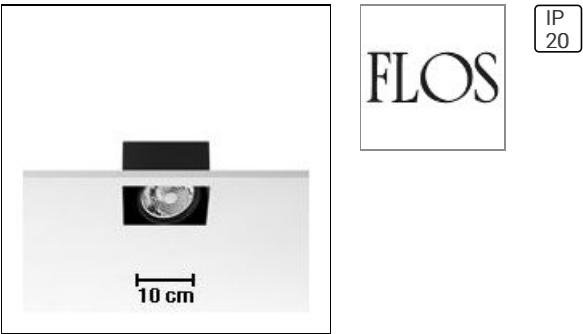

Desing for very low voltage lamps, discharge, main voltage and flourescent lamps. Pressed steel and matt black, powder-coated recessed housing, extruded aluminium recessed trim frame for use with false ceiling systems.

Light output 1

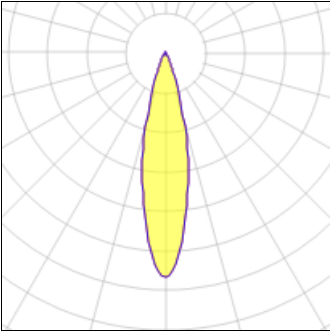

| | | | |
|-----------------------|---------|-------------|---------|
| 1 x Metal halide lamp | | | |
| Nominal lamp power | 70 W | Socket | Gx12 |
| Lamp flux | 6600 lm | LOR | 46% |
| Luminous efficacy | 44 lm/W | Total flux | 3059 lm |
| CCT | 2900 K | Total power | 70 W |
| CRI | 84 | | |

Mounting mode

Ceiling recessed

Shape and measurements

Length: 7.28 in
Width: 7.28 in
Height: 6.02 in

Adjustability

Cardanic

Electric

System power: 70 W

Protection

IP: 20