

STAGE ROUND Spotlight



SIMES



Holscher Design



www.simes.it/stage-round

STAGE ROUND

The Stage Round is a family of professional spotlights. The range is available from micro to mega sizes, all engineered with more beams, from Spot to Wide Flood, and comfortable optics, obtained thanks to reflectors or lenses designed to maximize the efficiency of the sources. Available for ground, wall or pole application, they can use accessories that optimize their installation such as the visor, the stake or the strap for trees fixation. Peculiarity of the Stage Round family is the micro version, available with a special "light blade" optic that, associated with the swivel body, is able to project lines of light in any direction.

TECHNICAL DESCRIPTION

Die-cast aluminium housing with high corrosion resistance. Stainless steel A4 screws. Pure aluminium reflectors, or with concentrating lenses. Radial lens (MICROSTAGE BLADE OF LIGHT). Clear toughened glass diffuser. Silicone gaskets. Double powder paint.

MICROSTAGE (all versions)

Luminaire supplied with 5,0m neoprene H05RN-F cable for remote connections.

MINISTAGE (all versions, except for RGBW)

Luminaire supplied with 5,0m FEP/FEP+PCP cable for remote connections.

MINISTAGE RGBW AND STAGE RGBW

Luminaire supplied with 6,0m FEP+RUBBER cable for remote connections.

STAGE SPOT / ARM AND MEGASTAGE SPOT

Luminaire supplied with neoprene H05RN-F cable and connector for connections the base.

STAGE E MEGASTAGE POLE MOUNTED

Luminaire supplied with 6,0m neoprene H05RN-F cable for remote connections.

MEGASTAGE RGBW

Luminaire supplied with neoprene H05RN-F cable and connector + N°2 DMX cables and connectors for connections in the base.

PATENTED (BLADE OF LIGHT)
REGISTERED DESIGN

PROTECTION CLASS
IP66

ISOLATION CLASS

CLASS II □
CLASS III ◆ MINISTAGE and STAGE RGBW

MECHANICAL RESISTANCE

IK 06 MICROSTAGE ROUND
IK 07 MINISTAGE ROUND
IK 08 STAGE ROUND
IK 09 MEGASTAGE ROUND



COLOURS

.14 Aluminium Grey

.24 Anthracite Grey





Microstage



S.1301W Blade of Light beam with lens
 LED MODULE **3000K** CRI80 411lm 3,3W
 (on request 2700K CRI80 377lm)
 (on request 4000K CRI80 431lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable
 With Radial Lens 85°x5°

Microstage
 Wall arm and garden




S.1331W Blade of Light beam with lens
 LED MODULE **3000K** CRI80 411lm 3,3W
 (on request 2700K CRI80 377lm)
 (on request 4000K CRI80 431lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable
 With Radial Lens 85°x5°



S.1309
STAKE for MICROSTAGE ROUND and ARM
 in polypropylene.
 Colour: black (code 09)

Adhesive gobo
 for Microstage

(included in the "Blade of Light" version
 S.1301W, S.1331W and S.1339W)

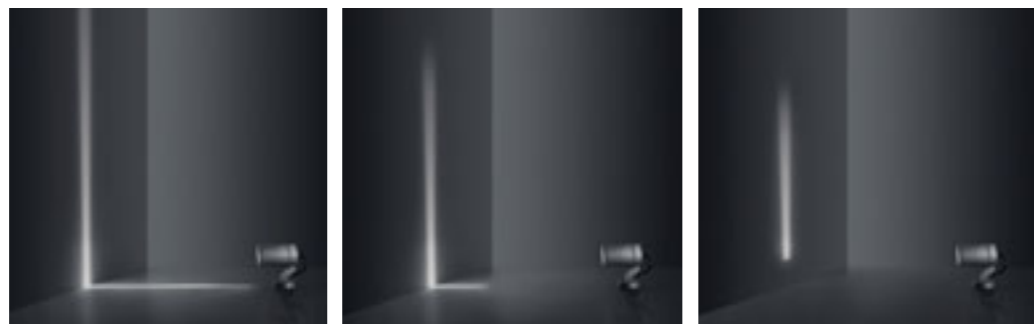

The adhesive gobo for Microstage can be adapted to modify the beam aperture and then applied on the front glass of the fixture. By simply cutting at the level of the required degrees you create a slit to allow the desired light emission.



Adhesive gobo with 70° aperture





Adhesive gobo with 50° aperture




Adhesive gobo with 30° aperture






S.1300W Spot beam with lens
 LED MODULE **3000K** CRI90 322lm 2,8W
 (on request 2700K CRI90 297lm)
 (on request 4000K CRI80 396lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable

Beam lenses available on request with no surcharge: 65°





S.1305W Flood beam with reflector
 LED MODULE **3000K** CRI90 356lm 3,0W
 (on request 2700K CRI90 339lm)
 (on request 4000K CRI80 454lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable



S.1330W Spot beam with lens
 LED MODULE **3000K** CRI90 322lm 2,8W
 (on request 2700K CRI90 297lm)
 (on request 4000K CRI80 396lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable

Beam lenses available on request with no surcharge: 65°



S.1335W Flood beam with reflector
 LED MODULE **3000K** CRI90 356lm 3,0W
 (on request 2700K CRI90 339lm)
 (on request 4000K CRI80 454lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable

Accessories





S.1308
VISOR for MICROSTAGE
ROUND SPOT and ARM
 Colour: black (cod .09)



S.1627.09
STRAP FOR APPLICATIONS ON TREES
for MICROSTAGE ROUND SPOT
 Black strap




S.1309
STAKE for MICROSTAGE ROUND SPOT
and ARM
 in polypropylene.
 Colour: black (code 09)




S.1310W Spot beam with lenses
 LED MODULE **3000K** CRI90 1040lm 8,7W
 (on request 2700K CRI90 960lm)
 (on request 4000K CRI80 1280lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable

Beam lenses available on request with no surcharge: 65° and 10°x44°




S.1315W Medium beam with reflector
 LED MODULE **3000K** CRI90 1251lm 9,5W
 (on request 2700K CRI90 1195lm)
 (on request 4000K CRI80 1544lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable



S.1316W Wide Flood beam with reflector
 LED MODULE **3000K** CRI90 1251lm 9,5W
 (on request 2700K CRI90 1195lm)
 (on request 4000K CRI80 1544lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable



S.1313 Flood beam with lenses
 LED MODULE **RGBW (W=3000K)** 508lm 7,5W
24V PWM

Requires RGBW constant voltage remote power supply and DMX or DALI controller (pag. 528-529)




S.1340W Spot beam with lenses
 LED MODULE **3000K** CRI90 1040lm 8,7W
 (on request 2700K CRI90 960lm)
 (on request 4000K CRI80 1280lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable


Beam lenses available on request with no surcharge: 65° and 10°x44°

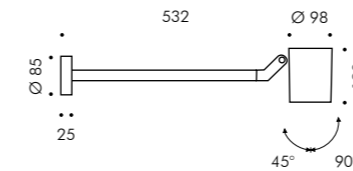

S.1345W Medium beam with reflector
 LED MODULE **3000K** CRI90 1251lm 9,5W
 (on request 2700K CRI90 1195lm)
 (on request 4000K CRI80 1544lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable



S.1346W Wide Flood beam with reflector
 LED MODULE **3000K** CRI90 1251lm 9,5W
 (on request 2700K CRI90 1195lm)
 (on request 4000K CRI80 1544lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable



S.1343 Flood beam with lenses
 LED MODULE **RGBW (W=3000K)** 508lm 7,5W
24V PWM

Requires RGBW constant voltage remote power supply and DMX or DALI controller (pag. 528-529)


Accessories



S.1318
VISOR for MINISTAGE
ROUND SPOT and ARM
 Colour: black (cod .09)




S.1319
STAKE for MINISTAGE ROUND SPOT and ARM
 in polypropylene.
 Colour: black (code 09)




S.1320W Spot beam with lenses
 LED MODULE **3000K** CRI90 2893lm 25,1W
 (on request 2700K CRI90 2671lm)
 (on request 4000K CRI80 3561lm)
 220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH


Beam lenses available on request with no surcharge: 65° and 10°x44°



S.1325W Flood beam with reflector
 LED MODULE **3000K** CRI90 4027lm 31,1W
 (on request 2700K CRI90 3829lm)
 (on request 4000K CRI80 4936lm)
 220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH





S.1326W Wide Flood beam with reflector
 LED MODULE **3000K** CRI90 4027lm 31,1W
 (on request 2700K CRI90 3829lm)
 (on request 4000K CRI80 4936lm)
 220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH




S.1323 Flood beam with lenses
 LED MODULE **RGBW (W=3000K)** 1523lm 22,5W
24V PWM

Requires RGBW constant voltage remote power supply and DMX or DALI controller (pag. 528-529)

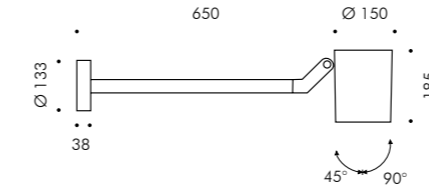


S.1350W Spot beam with lenses
 LED MODULE **3000K** CRI90 2893lm 25,1W
 (on request 2700K CRI90 2671lm)
 (on request 4000K CRI80 3561lm)
 220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH


Beam lenses available on request with no surcharge: 65° and 10°x44°



S.1355W Flood beam with reflector
 LED MODULE **3000K** CRI90 4027lm 31,1W
 (on request 2700K CRI90 3829lm)
 (on request 4000K CRI80 4936lm)
 220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH




S.1356W Wide Flood beam with reflector
 LED MODULE **3000K** CRI90 4027lm 31,1W
 (on request 2700K CRI90 3829lm)
 (on request 4000K CRI80 4936lm)
 220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.1353 Flood beam with lenses
 LED MODULE **RGBW (W=3000K)** 1523lm 22,5W
24V PWM

Requires RGBW constant voltage remote power supply and DMX or DALI controller (pag. 528-529)




Accessories



S.1328
VISOR for STAGE ROUND SPOT and ARM
 Colour: black (cod .09)




S.3554
STAKE only for STAGE ROUND SPOT
 in polypropylene.
 Colour: black (code 09)




S.1360W Spot beam with lenses
 LED MODULE **3000K** CRI90 5603lm 49,6W
 (on request 2700K CRI90 5173lm)
 (on request 4000K CRI80 6897lm)
 220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH


Beam lenses available on request with no surcharge: 65° and 10°x44°




S.1365W Flood beam with reflector
 LED MODULE **3000K** CRI90 7152lm 57,3W
 (on request 2700K CRI90 6769lm)
 (on request 4000K CRI80 8750lm)
 220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.1366W Wide Flood beam with reflector
 LED MODULE **3000K** CRI90 7152lm 57,3W
 (on request 2700K CRI90 6769lm)
 (on request 4000K CRI80 8750lm)
 220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.1363 Flood beam with lenses
 LED MODULE **RGBW (W=3000K)** 2540lm 37,5W
 220V-240Vac 50/60Hz
 Requires DMX controller (pag. 528)



Accessories



S.1368
VISOR for MEGASTAGE ROUND SPOT
 Colour: black (cod .09)





S.3554
STAKE for MEGASTAGE ROUND SPOT
 in polypropylene.
 Colour: black (code 09)



“Art Park”, Idroscalo, Milan, Italy © Simes S.p.A.


ø60mm - ø76mm MICROSTAGE
ø76mm - ø102mm MINISTAGE

Microstage
Blade of Light





S.1339W Blade of Light beam with lens
LED MODULE 3000K CRI80 411lm 3,3W
(on request 2700K CRI80 377lm)
(on request 4000K CRI80 431lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
With Radial lens 85°x5°

Microstage




S.1337W Spot beam with lens
LED MODULE 3000K CRI90 322lm 2,8W
(on request 2700K CRI90 297lm)
(on request 4000K CRI80 396lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Beam lenses available on request
with no surcharge: 65°




S.1338W Flood beam with reflector
LED MODULE 3000K CRI90 356lm 3,0W
(on request 2700K CRI90 339lm)
(on request 4000K CRI80 454lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Ministage





S.1370W Spot Optic with lenses
LED MODULE 3000K CRI90 1040lm 8,7W
(on request 2700K CRI90 960lm)
(on request 4000K CRI80 1280lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Beam lenses available on request
with no surcharge: 65° and 10°x44°





S.1375W Medium Optic with reflector
LED MODULE 3000K CRI90 1251lm 9,5W
(on request 2700K CRI90 1195lm)
(on request 4000K CRI80 1544lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




S.1376W Wide Flood Optic with reflector
LED MODULE 3000K CRI90 1251lm 9,5W
(on request 2700K CRI90 1195lm)
(on request 4000K CRI80 1544lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

ø76mm - ø102mm


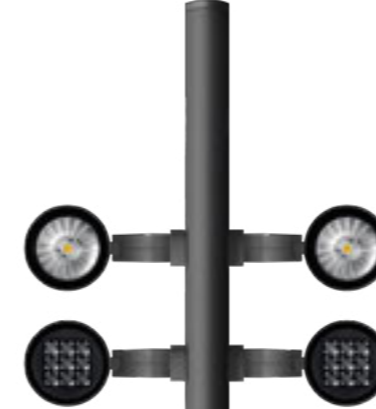


S.1380W Spot beam with lenses
LED MODULE 3000K CRI90 2893lm 25,1W
(on request 2700K CRI90 2671lm)
(on request 4000K CRI80 3561lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Beam lenses available on request
with no surcharge: 65° and 10°x44°




S.1385W Medium beam with reflector
LED MODULE 3000K CRI90 4027lm 31,1W
(on request 2700K CRI90 3829lm)
(on request 4000K CRI80 4936lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH




S.1386W Wide Flood beam with reflector
LED MODULE 3000K CRI90 4027lm 31,1W
(on request 2700K CRI90 3829lm)
(on request 4000K CRI80 4936lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Ø102mm - Ø120mm




S.1390W Spot beam with lenses
 LED MODULE 3000K CRI90 5603lm 49,6W
 (on request 2700K CRI90 5173lm)
 (on request 4000K CRI80 6897lm)
 220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Beam lenses available on request
 with no surcharge: 65° and 10°x44°



S.1395W Flood beam with reflector
 LED MODULE 3000K CRI90 7152lm 57,3W
 (on request 2700K CRI90 6769lm)
 (on request 4000K CRI80 8750lm)
 220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.1396W Wide Flood beam with reflector
 LED MODULE 3000K CRI90 7152lm 57,3W
 (on request 2700K CRI90 6769lm)
 (on request 4000K CRI80 8750lm)
 220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

