



Elegant and minimal luminaire, Zen is engineered to assure significant energy savings and excellent visual comfort. The moulded, etched and painted glass diffuser ensures excellent diffused and uniform light distribution on the glass itself and on the surrounding ambient. IP65 degree protection and the possibility of integrating protective grids, lead Zen to be suitable for any architectural environment.

TECHNICAL DESCRIPTION

Die cast aluminium housing with high corrosion resistance. Fixing base with heat dissipation system. Acid-etched glass diffuser 5mm thick, white painted internally. Stainless steel A4 screws. Luminaire with double cable entry and grommet (Luminaire suitable for double grommets). Silicone gaskets. Zen Round 320 and Square 300 supplied with emergency inverter and battery to supply 1 hour emergency lighting in the case of a mains failure. Double powder paint.

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS I

MECHANICAL RESISTANCE
IK 06



COLOURS

.01 White

.09 Black

.14 Aluminium Grey

REGISTERED DESIGN



Round

**S.6950W**

LED MODULE **3000K** CRI90 1125lm 9,5W
 (on request 2700K CRI90 1068lm)
 (on request 4000K CRI80 1437lm)
 220V-240Vac 50/60Hz
Phase-cut dimmer

Round 320mm

**S.6980W**

LED MODULE **3000K** CRI90 2400lm 20,4W
 (on request 2700K CRI90 2280lm)
 (on request 4000K CRI80 3201lm)
 220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

S.6981W**Emergency version**

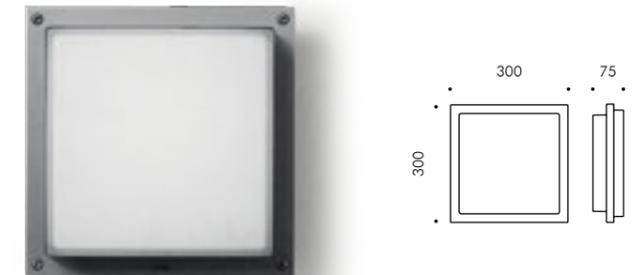
Complies with CEI EN 60598-2-22
 LED MODULE **3000K** CRI90 2400lm 20,4W
 (on request 2700K CRI90 2280lm)
 (on request 4000K CRI80 3201lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable

Square

**S.6960W**

LED MODULE **3000K** CRI90 1125lm 9,5W
 (on request 2700K CRI90 1068lm)
 (on request 4000K CRI80 1437lm)
 220V-240Vac 50/60Hz
Phase-cut dimmer

Square 300mm

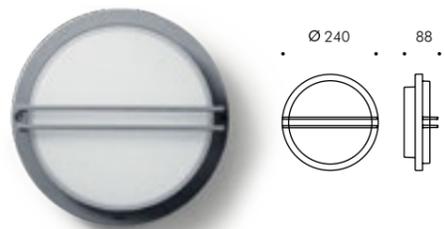
**S.6990W**

LED MODULE **3000K** CRI90 2400lm 20,4W
 (on request 2700K CRI90 2280lm)
 (on request 4000K CRI80 3201lm)
 220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

S.6991W**Emergency version**

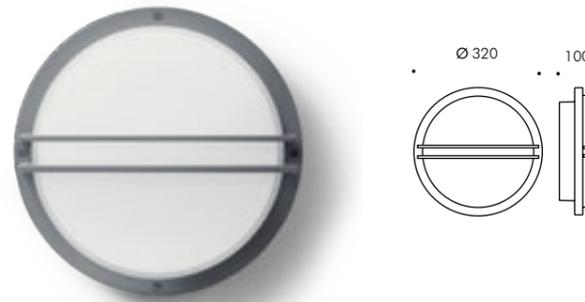
Complies with CEI EN 60598-2-22
 LED MODULE **3000K** CRI90 2400lm 20,4W
 (on request 2700K CRI90 2280lm)
 (on request 4000K CRI80 3201lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable

Round with grille

**S.6955W**

LED MODULE **3000K** CRI90 1125lm 9,5W
 (on request 2700K CRI90 1068lm)
 (on request 4000K CRI80 1437lm)
 220V-240Vac 50/60Hz
Phase-cut dimmer

Round 320mm with grille

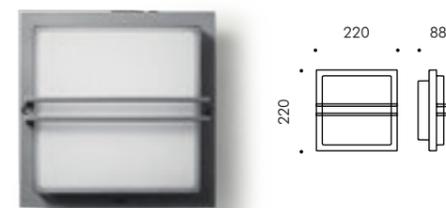
**S.6985W**

LED MODULE **3000K** CRI90 2400lm 20,4W
 (on request 2700K CRI90 2280lm)
 (on request 4000K CRI80 3201lm)
 220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

S.6986W**Emergency version**

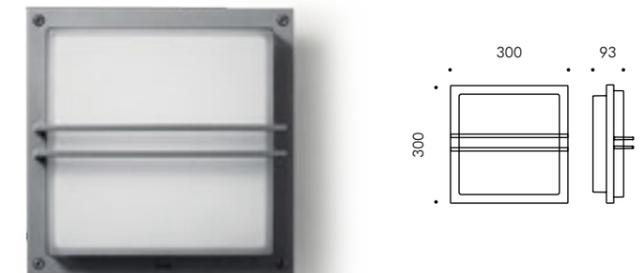
Complies with CEI EN 60598-2-22
 LED MODULE **3000K** CRI90 2400lm 20,4W
 (on request 2700K CRI90 2280lm)
 (on request 4000K CRI80 3201lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable

Square with grille

**S.6965W**

LED MODULE **3000K** CRI90 1125lm 9,5W
 (on request 2700K CRI90 1068lm)
 (on request 4000K CRI80 1437lm)
 220V-240Vac 50/60Hz
Phase-cut dimmer

Square 300mm with grille

**S.6995W**

LED MODULE **3000K** CRI90 2400lm 20,4W
 (on request 2700K CRI90 2280lm)
 (on request 4000K CRI80 3201lm)
 220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

S.6996W**Emergency version**

Complies with CEI EN 60598-2-22
 LED MODULE **3000K** CRI90 2400lm 20,4W
 (on request 2700K CRI90 2280lm)
 (on request 4000K CRI80 3201lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable

