



# Product data sheet

TRUSYS® FLEX VERY NARROW 35W 865 VN CL WT DALI  
4099854191091  
LEDVANCE

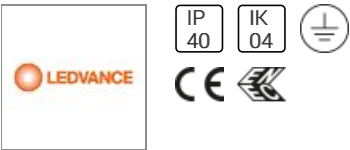

Luminaire inserts with very narrow light distribution, up to 175 lm/W. Product features: Beam angle very narrow: 30°. Click into place solution with smart click buttons. Luminous efficacy: up to 175 lm/W. Fixed luminaire taps. Luminaire versions available with on-off or IoT-ready DALI-2 driver. Steel-sheet housing. Lens material: PMMA. Type of protection: IP40. Product benefits: Very directed light distribution for high rack warehouses. Easy installation, no tools required for connection. Energy saving and cost-effective. Flexible application due to a range of different lumen packages and beam angles. 5 years guarantee. Areas of application: Direct replacement for luminaires with fluorescent lamps. Industry halls, high rack warehouse, hardware stores. Discounters, supermarkets. Equipment / Accessories: Mounting rail with fixed integrated 5- and 8-pole cable.

## Light output 1 (integrated)

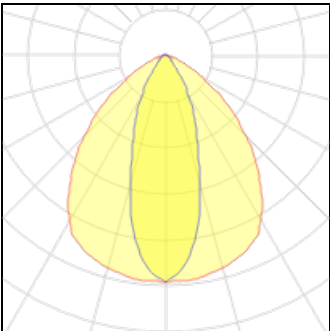

|                    |          |             |        |
|--------------------|----------|-------------|--------|
| Lamp type          | LED      | CCT         | 6500 K |
| Nominal lamp power | 35 W     | CRI         | 80     |
| Total flux         | 5800 lm  | LOR         | 100%   |
| Luminous efficacy  | 166 lm/W | Total power | 35 W   |

## Mounting mode

Ceiling mounted, Pendant

## Shape and measurements

Length: 59.06 in  
Width: 3.06 in  
Height: 1.55 in  
Weight: 1.65 kg

## Adjustability

Fixed

## Design

Material impression: Stainless steel  
Color of housing: White

## Electric

System power: 35 W  
Appliance Class: I

## Protection

IP: 40  
IK: 04  
Designation labels: CE, ENEC

## Other operating numbers

Ambient temperature range: -13...104°F