



Product data sheet

PRIMA 1.4FT SNS PC 3200/840 COR 3F
106514
TREVOS

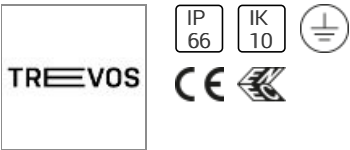

resistant to dust, humidity and spraying water, the light fitting is suitable for both indoor and outdoor roofed industrial spaces; variable suspension spacing ranging from 700 - 960 mm; enable the light to be installed onto suspension fittings left over from previous lighting; optimal mounting height: 3 to 8 m; digitally dimmable. DALI driver with corridor function, microwave motion sensor; Body: grey PC (high mechanical resistance, UV stability, RAL 7035); Diffuser: translucent PC (high mechanical resistance, UV stability); Reflector: steel sheet, white (RAL 9003); Clips: polyamide + 15 % fibreglass; Sealing: polyurethane (PUR), foam-filled base groove; Connection: screwless five-pole terminal block, 5-wire connecting cabling for feed-through installation (1.5 mm2 cross-section, 2.5 mm2 available on demand); Power: 20,1 W; Luminaire flux: 3030 lm; Lifetime: L90/B10; 50000 hours; Impact strength: IK10; Ambient temperature: -25|50 °C; Weight: 2,1 kg;

Light output 1 (integrated)



Lamp type	LED	CCT	4000 K
Nominal lamp power	20.1 W	CRI	80
Total flux	3260 lm	LOR	100%
Luminous efficacy	162 lm/W	ULOR	4%
		Total power	20.1 W

Mounting mode

Ceiling mounted

Shape and measurements

Length: 46.26 in

Width: 3.86 in

Height: 3.31 in

Adjustability

Fixed

Design

Material impression: Plastic

Color of housing: Silver gray, White

Designer: TREVOS

Electric

System power: 20.1 W

Ballast: ECG

Appliance Class: I

Integrated sensors

Integrated sensors: Motion sensor

Protection

IP: 66

IK: 10

Designation labels: CE, ENEC

Other operating numbers

Ambient temperature range: -13...122°F