



# Product data sheet

NANOTTICA 1.5FT WB ABS 5500/840 3F  
101015  
TREVOS

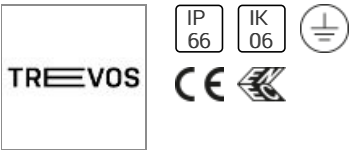

absolute control over emitted light thanks to patented nano-optics; variable suspension spacing ranging from 970 - 1230 mm; enable the light to be installed onto suspension fittings left over from previous lighting; basic beam angle: wide beam (WB); optimal mounting height: 2.5 to 4 m; ON/OFF electronic driver (AC, DC on demand); Body: dark grey ABS (high chemical resistance, UV stability, RAL 7001); Diffuser: clear AC with nano-optics (high mechanical resistance, UV stability); Reflector: steel sheet, white (RAL 9003); Clips: polyamide + 15 % fibreglass; Sealing: polyurethane (PUR), foam-filled base groove; Connection: screwless five-pole terminal block, 5-wire connecting cabling for feed-through installation (1.5 mm<sup>2</sup> cross-section, 2.5 mm<sup>2</sup> available on demand); Power: 33,3 W; Luminaire flux: 4920 lm; Lifetime: L90/B10; 50000 hours; Impact strength: IK06; Ambient temperature: -25|45 °C; Weight: 2,2 kg;

## Light output 1 (integrated)



Lamp type	LED	CCT	4000 K
Nominal lamp power	33.3 W	CRI	80
Total flux	5590 lm	LOR	100%
Luminous efficacy	168 lm/W	ULOR	4%
		Total power	33.3 W

## Mounting mode

Ceiling mounted

## Shape and measurements

Length: 57.28 in  
Width: 3.86 in  
Height: 3.31 in

## Adjustability

Fixed

## Design

Material impression: Plastic  
Color of housing: Silver gray, White  
Designer: TREVOS

## Glare protection

Glare protection: UGR < 19

## Electric

System power: 33.3 W  
Ballast: ECG  
Appliance Class: I

## Protection

IP: 66  
IK: 06  
Designation labels: CE, ENEC

## Other operating numbers

Ambient temperature range: -13...113°F